



Color Variants

VG295234AU
Stainless steel with aluminium control panel
Width 90 cm

VG295234AU
Gas cooktop
Stainless steel with aluminium control panel
Width 90 cm
Natural gas 10 mbar
Wok burner with 5 KW

Top appliance in the market, 17 kW on 5 burners
Solid smooth-surface cast pan supports
Automatic fast ignition, electronic flame monitoring

Cooking zones
1 three-ring wok burner (300 W – 5000 W), suitable for pots up to max. ø 32 cm.
2 two-ring high output burners (160 W – 4000 W), suitable for pots up to max. ø 28 cm.
2 two-ring standard burners (160 W – 2000 W), suitable for pots up to max. ø 24 cm.

Handling
Integrated control panel with cooking zone and output level markings.
One-handed operation.
Automatic fast ignition.

Features
Three-part cast pan support with flat, continuous pot surface.
Brass burner rings.

Safety
Electronic flame monitoring with automatic re-ignition.
Safety shut-off.

Planning notes
Special nozzles can be ordered as spare parts.
Plan for an electrical connection (the appliance is not operable without power supply).
Air intake from above.
No intermediate shelf required.
Rear panel and wall trims must be heat-resistant and consist of a non-flammable material.
Installation in a 90 cm wide lower cabinet is required.
An oven can be installed under the cooktop.
Appliance must be fixed from underneath.
A minimum lateral clearance of at least 300 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
Cooktop clamping range: 30 - 50 mm.
With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.
Minimum clearance between gas cooktop(s) with more than 11 kW and ventilation hood 70 cm.
Appliance weight: approx. 29 kg.


Connection
Total connected load gas 17.0 kW.
Connecting cable 1.4 m with plug.

Characteristics
Product name/family
gas hob w integrated controls
Built-in / Free-standing
CONSTR_TYPE.Built-in
Energy input
Gas
Total number of positions that can be used at the same time
5
Required niche size for installation (HxWxD)
132 x 885 x 490
Width of the product (mm)
914
Dimensions of the product (mm)
132 x 914 x 510
Net weight (kg)
29.0
Gross weight (kg)
32.0
Residual heat indicator
without
Location of control panel
Hob front
Basic surface material
brushed stainless steel
Color of surface
Stainless steel
Color of frame
Stainless steel
Approval certificates
AGA, SA
Length electrical supply cord (cm)
140

Consumption and connection features
Electrical connection rating (W)
25
Gas connection rating (W)
17000
Current (A)
10
Voltage (V)
220-240
Frequency (Hz)
60; 50

2016-10-03
Page 1

VG295234AU
Gas cooktop
Stainless steel with aluminium control
panel
Width 90 cm
Natural gas 10 mbar
Wok burner with 5 KW
2016-10-03
Page 2

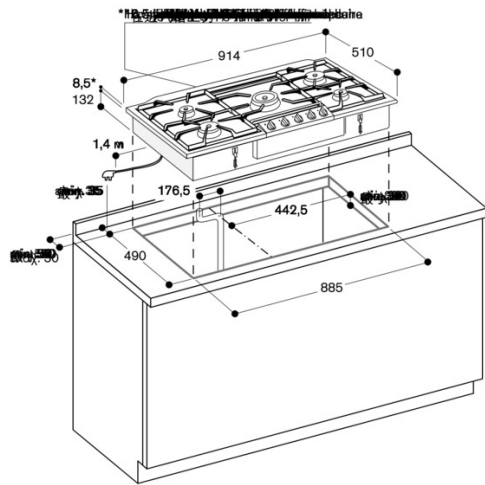

Gas connection

