



Color Variants

VG264234AU  
Aluminium control panel  
Width 60 cm

Installation Accessories

VV200034  
Aluminium connection strip for  
combination with further Vario  
cooktops

VG264234AU  
Vario gas cooktop 200 series  
Aluminium control panel  
Width 60 cm  
Natural gas 10 mbar

Can be combined with the cooktops  
of the Vario 200 series to a harmonic  
unity  
Generous control panel for  
comfortable and secure operation  
Solid smooth-surface cast pan  
supports for easy and safe  
positioning of cookware  
9.4 KW on 4 burners

**Cooking zones**  
2 high output burners (560 – 2800 W),  
suitable for pots up to max. ø 22 cm.  
2 standard burners (380 – 1900 W),  
suitable for pots up to max. ø 22 cm.

**Handling**  
Control knobs with cooking zone and  
output level markings.  
One-handed operation.  
Electric ignition.

**Features**  
Two-part cast pan support with  
continuous pot surface.  
Enamelled burner cover.

**Safety**  
Thermoelectric safety pilot.



**Planning notes**  
Special nozzles can be ordered as  
spare parts.  
Air intake from above.  
No intermediate shelf required.  
Appliance can be snapped into the  
worktop from above.  
Securing rail on the rear and the front.  
A minimum lateral clearance of at least  
150 mm from adjacent heat-sensitive  
furniture or contact surfaces must be  
observed or thermal insulation fitted.  
With a total connected load of  
more than 11 kW local regulations  
concerning room ventilation, room  
size and combination of extraction or  
recirculation hoods must be observed.  
Minimum clearance between gas  
cooktop(s) with more than 11 kW and  
ventilation hood 70 cm.  
Special nozzles (order 2 of each):  
Part No. 433603 Natural gas 20 mbar  
Part No. 419831 Liquid gas 30 mbar  
Part No. 419830 Liquid gas 50 mbar

**Connection**  
Total connected load gas 9.4 kW.  
Total connected load electric 1.0 W.  
Connecting cable 1.4 m with plug.

**Characteristics**  
**Product name/family**  
gas hob w integrated controls  
**Built-in / Free-standing**  
CONSTR\_TYPE.Built-in  
**Energy input**  
Gas  
**Total number of positions that can be  
used at the same time**  
4  
**Required niche size for installation  
(HxWxD)**  
55 x 560 x 490  
**Width of the product (mm)**  
580  
**Dimensions of the product (mm)**  
55 x 580 x 523  
**Net weight (kg)**  
13.0  
**Gross weight (kg)**  
16.0  
**Residual heat indicator**  
without  
**Location of control panel**  
Hob front  
**Basic surface material**  
brushed stainless steel  
**Color of surface**  
Stainless steel  
**Color of frame**  
Stainless steel  
**Approval certificates**  
AGA, SA  
**Length electrical supply cord (cm)**  
140

**Consumption and connection features**  
**Electrical connection rating (W)**  
1  
**Gas connection rating (W)**  
9400  
**Current (A)**  
10  
**Voltage (V)**  
220-240  
**Frequency (Hz)**  
50; 60

2016-10-03  
Page 1

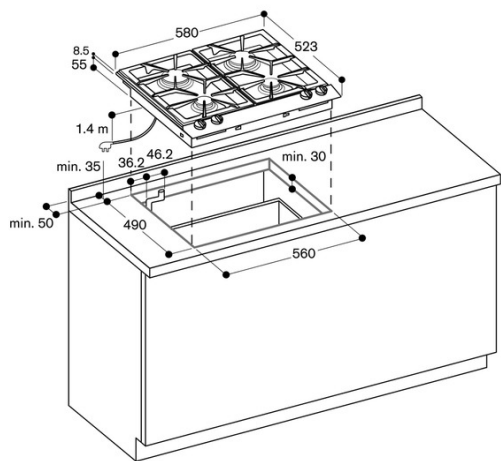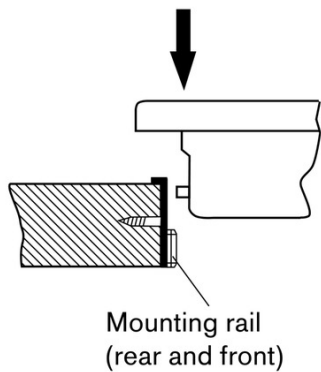

### Gas connection

